


■Features

- High Luminous LEDs
- 3mm Flat Standard Directivity
- Long Lifetime Operation
- Superior Weather-resistance
- UV Resistant Epoxy
- White Diffused Type

■Applications

- Toys
- Audio
- Games
- Other Lighting

■Outline Dimension

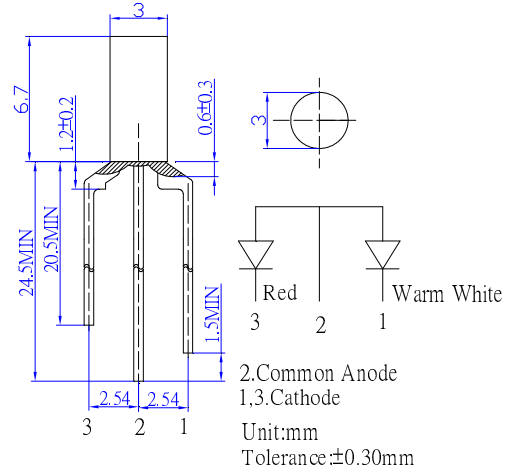


■Absolute Maximum Rating

(Ta=25°C)

Item	Symbol	Value		Unit
		Red	White	
DC Forward Current	I _F	30	30	mA
Pulse Forward Current*	I _{FP}	100	100	mA
Reverse Voltage	V _R	5	5	V
Power Dissipation	P _D	78	108	mW
Operating Temperature	T _{opr}	-30 ~ +85		°C
Storage Temperature	T _{stg}	-40~ +100		°C
Lead Soldering Temperature	T _{sol}	260°C/5sec		-

*Pulse width Max.10ms Duty ratio max 1/10

■Directivity

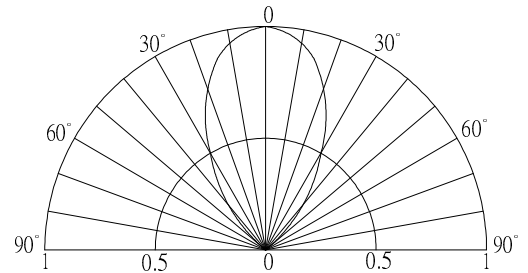

■Electrical -Optical Characteristics

(Ta=25°C)

Item	Symbol	Condition	Min.	Typ	Max.	Unit
DC Forward Voltage	V _F (Red)	I _{F2} =20mA	1.8	2.1	2.6	V
	V _F (White)	I _{F1} =20mA	2.9	3.1	3.6	V
DC Reverse Current	I _R	V _R =5V	-	-	10	μA
Domi. Wavelength*	λ _D (Red)	I _{F2} =20mA	620	625	630	nm
	CCT(White)	I _{F1} =20mA	3000K		-	-
Luminous Intensity*	I _V (Red)	I _{F2} =20mA	750	1120	-	mcd
	I _V (White)	I _{F1} =20mA	750	1120	-	mcd
50% PowerAngle	2θ1/2	I _{F1} =20mA	-	60	-	deg

*Tolerance of dominant chromaticity is ±10%

*2 Tolerance of luminous intensity is ±15%